

FUSO

FN62FM



NO LIMITS, NO BOUNDARIES.
BUILT TO LAST.



UNECE
REGULATION COMPLIANT

DRIVING YOUR BUSINESS



FUSO Authorized Distributor:
Hap Seng Trucks Distribution Sdn Bhd (1250643-T)

TECHNICAL SPECIFICATION

FN62FM

WEIGHT

Max G.V.W.	kg	25,000
Kerb weight approx.	kg	6,835
Drive System		6 X 4

DIMENSIONS

Wheelbase (W.B.)	mm	5,460	
Overall length (O.A.L.)	mm	8,490	
Overall width (O.A.W.)	mm	2,470	
Overall height (O.A.H.)	mm	2,675	
Tread	Front (T.F.)	mm	1,925
	Rear (T.R.)	mm	1,850
Ground clearance approx. (G.C.)	mm	215	
Cab to rear axle (C.A.)	mm	4,715	
Cab to end frame (C.E.)	mm	6,430	
Frame width (F.W.)	mm	851	
Front overhang (F.O.H.)	mm	1,245	
Rear overhang (R.O.H.)	mm	1,715	

PERFORMANCE CALCULATED

Max. speed	km/h	90
Max. gradeability	%(tanθ)	43
Min. turning radius	m	9.3

ENGINE

Model	Mitsubishi 6M60-1AT2 Turbocharge with intercooler	
Type	4-stroke, water-cooled, common rail, diesel engine	
No. of cylinders	6 in line	
Piston displacement	cc	7,545
Max. output	kW(PS)@rpm	199(270)@2,600
Max. torque	Nm@rpm	785@1,400
Air cleaner	Dry paper dual element type	
Alternator	Volt	24

DRIVELINE

Clutch	Hydraulic control, coil spring type, single dry plate with air pressure assistance	
Transmission	EATON ES11109 9 forward and 1 reverse speed 2nd to 9th range; Synchromesh gears 1st & Rev. range; Constantmesh gears	
Gear ratios	12.64-8.81-6.55-4.77-3.55-2.48-1.85-1.34-1.00-Reverse 13.21	
Final reduction gear	Single reduction, hypoid gear	
Ratio	6.166	


CHASSIS

Axle type/Rating	Front	Reverse Elliot, "I" beam type/6,300kg
	Rear	Full floating type, tandem drive with interaxle differential and locking device/10,800kg x 2
Tyres	11R22.5 148/145 (Tubeless)	
Steering	Right hand steering. Ball nut type with integral type hydraulic power booster. Telescopic and tilt steering column with steering lock	
Suspension	Front	Long taper leaf springs with shock absorbers
	Rear	Laminated leaf springs with trunnion base and radius rod
Brake	Service	Full air, dual circuit, wedge type, ABS
	Parking	Spring loaded type on rear wheels
	Auxiliary	Exhaust brake
Fuel Tank	200 liters	
Electrical system	12 Volt x 2, 65Ah at 20 hr. rate	

Fuel Saving
(Aerodynamic)




Easy Frame Assembly

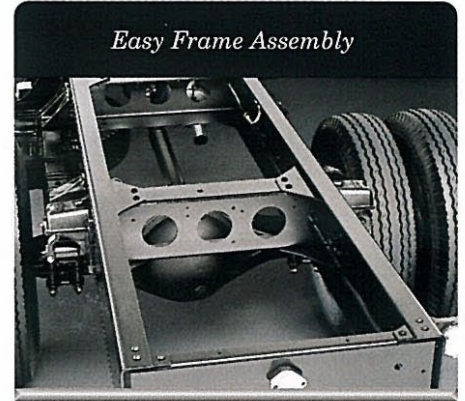

Durable
(Strengthened Chassis Frame)



Safety & Reliability
(Full Air Brake)

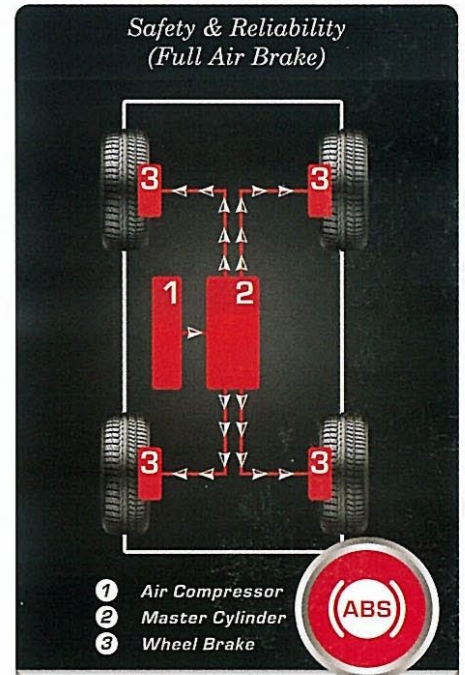

FUSO authorised dealer:

MITSUBISHI FUSO authorised dealer
LEANG SENG MOTORS (1980) SDN. BHD.
 (Incorporated in Malaysia Regn. No. 60377-T)
 1181-B & C, Jalan Sultan Ibrahim, 15050 Kota Bharu, Kelantan.
 Tel: 09 743 1351, 744 6657 Fax: 09 744 7042
 Email: leangseng2@yahoo.com

100,000km
 OR
2 YEARS WARRANTY*
HEAVY DUTY TRUCK

FUSO authorized distributor:

Hap Seng Trucks Distribution Sdn Bhd (1250643-T)

No. 1, Jalan Kinrara 2, Taman Perindustrian Bandar Kinrara, 47180 Puchong, Selangor, Malaysia.

Website: www.fuso.my